VIDEOMIC GO II™

LIGHTWEIGHT DIRECTIONAL MICROPHONE

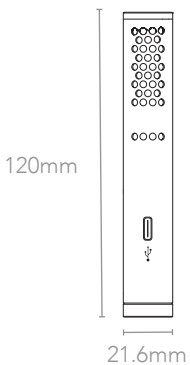**HIGHLY DIRECTIONAL** | **3.5MM TRS OUTPUT** | **DIGITAL USB OUTPUT** | **iPhone & Android COMPATIBLE**
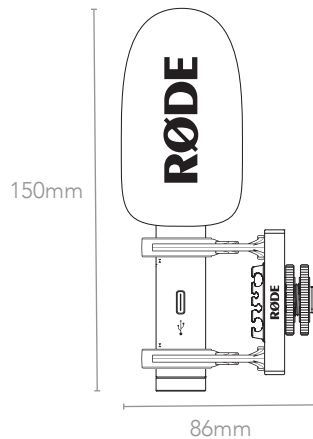
The VideoMic GO II is a versatile and lightweight shotgun microphone that excels in a range of recording applications. It features a 3.5mm TRS output for use with a camera, plus a digital USB output for recording with mobile devices and computers*. It delivers crisp, clear, directional sound, making it ideal for filmmaking and vlogging, and is also fully compatible with the RØDE Connect podcasting and streaming software for Mac and PC. When used in USB mode, the 3.5mm output doubles as a headphone output for easy monitoring and playback.

- Lightweight shotgun microphone
- 3.5mm TRS output for use with cameras
- Digital USB output for use with mobile devices and computers*
- Compatible with RØDE Connect software
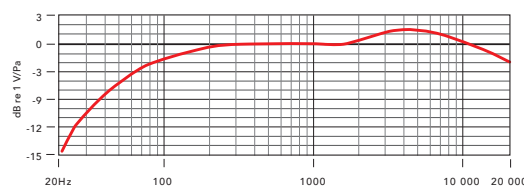
VideoMic GO II (microphone only)

120mm

21.6mm

VideoMic GO II with SM8-R and foam windshield

150mm

86mm

ACOUSTIC & ELECTRICAL SPECIFICATIONS

Acoustic Principle:	Pressure gradient electret condenser
Polar Pattern:	Supercardioid
Frequency Response:	20Hz - 20kHz
Output Impedance:	2K2Ω
Signal to Noise Ratio:	79 dBA
Equivalent Noise (A-weighted):	15 dBA
Dynamic Range:	95 dBA Typical
Sensitivity:	-31dBV(28.78mV @ 94dB SPL) ± 1dB @ 1kHz
Max Input SPL:	110 dB SPL
Output Connections:	• 3.5mm TRS • USB-C
Computer Connectivity:	USB-C (USB 2.0)
Simultaneous I/O:	Stereo input and output when in USB mode
Power Requirements:	• 3.5mm plug-in power 2 - 5V • USB 5V
Bit Depth:	24-bit
Sample Rates:	48 kHz
Minimum OS Requirement:	• macOS 10.15 • Windows 10 (20H2) • iOS 14 • Android 9.0

MECHANICAL SPECIFICATIONS

Weight (grams):	VideoMic GO II: 33 VideoMic GO II and included accessories: 96
Dimensions: (millimetres)	VideoMic GO II: Height: 120 Diameter: 21.6 VideoMic GO II and included accessories: Length: 150 Width: 70 Height: 86
Compatible RØDE Accessories:	WS12, SC14, SC15, SC16, SC17, SC18, SC19, SC20, SC21, SC22, SC23, SC24, SC25, SC26
Compatible RØDE Software:	• RØDE Connect • RØDE Central • RØDE Reporter
Included Accessories:	• 1 x SC14 TRS-TRS cable • 1 x foam windshield • 1 x SM8-R shockmount

POLAR PATTERN

Frequency:
8 KHz:
2 KHz:
500 Hz:

FREQUENCY RESPONSE

RØDE

*Additional cables required:
SC15 (Lightning), SC16 (USB-C), SC18 (USB-A)